

DATASHEET

SL60B SERIES

A LAMP RETROFIT

For Use As

- Office lighting
- Commercial lighting
- Residential and hospitality lighting


Features

- No UV or IR light radiation
- No direct, no reflected glare or flicker of light
- E27/E26 screw base
- 100 – 120 VAC power input
- Operation temperature: -20°C – +40°C
- Long lifetime: 40000 hours (L70)
- Optional Triac dimming function

Listing

U.L. Listed to U.S. and Canadian safety standards.

Product Dimensions

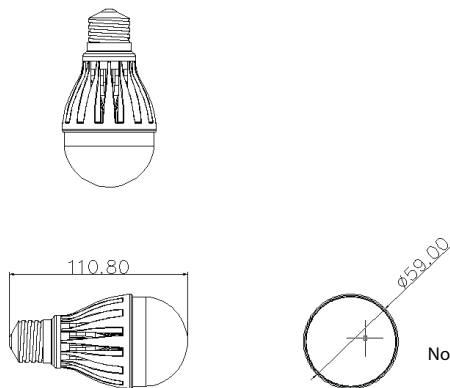


Notes: 1. Dimensions are in millimeters
 2. Tolerances unless otherwise mentioned
 ±5.0mm

Project	Date
Catalog Number	Type
Notes	



Light Intensity Distribution

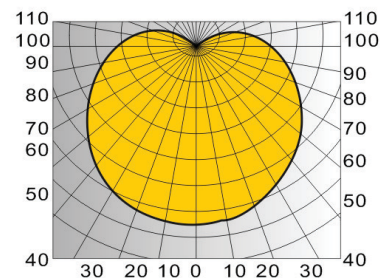

Ordering Information:

RSL60B	8W	3000K	TD	OM
Series	Output	Color	Dimming	Beam Spread
	8W Standard	2700K	ND Non Dimming	OM Omni Directional
	12W High	3000K	TD Triac Dimming	

Luminance and Technical Data

Luminous Flux measurement tolerance $\pm 10\%$

8W

Light Color	Inc White / 2700K	Warm White / 3000K
Luminous Flux (Typ)	600 lm	600 lm
Beam Angle	Omni Directional	Omni Directional
CRI	> 80	> 80
Input Voltage/ Frequency	100-120VAC / 50 - 60Hz	100-120VAC / 50-60Hz
Power Consumption	8W	8W
Dimmability	ND, TD	ND, TD
Mechanical Dimensions	Ø59.5 x 111.4mm	Ø59.5 x 111.4mm
Maximum Weight	180g	180g
Storage Temperature	-30°C - +80°C	-30°C - +80°C

12W

Light Color	Inc White / 2700K	Warm White / 3000K
Luminous Flux (Typ)	810 lm	810 lm
Beam Angle	Omni Directional	Omni Directional
CRI	> 80	> 80
Input Voltage/ Frequency	100-120VAC / 50 - 60Hz	100-120VAC / 50-60Hz
Power Consumption	12W	12W
Dimmability	ND, TD	ND, TD
Mechanical Dimensions	Ø59.5 x 111.4mm	Ø59.5 x 111.4mm
Maximum Weight	180g	180g
Storage Temperature	-30°C - +80°C	-30°C - +80°C

Supported Dimmer List

Manufacturer	Model	Volt / Freq (V/Hz)
Lutron	S-600	120/60
Lutron	DV-600P	120/60
Lutron	S-600PEH	120/60
Lutron	GL-600P	120/60

Zenaro Lighting Inc.
3610 Quantum Blvd.
Boynton Beach, FL 33426
Tel +561-424-2444
Fax +561-424-2440
www.zenarolighting.com

Disclaimer

- Information on this data sheet is provided "AS-IS" without warranty of fitness for a particular purpose or noninfringement.
- Zenaro reserves the right to change specification information without further notice to improve reliability, function or design.
- When using this product, please observe operating environmental conditions noted. Zenaro assumes no responsibility for products damaged from abuse or use outside recommended or intended application.

