

DATASHEET

SL35B SERIES

CANDLE LAMP RETROFIT

For Use As

- Office lighting
- Commercial lighting
- Residential and hospitality lighting


Features

- No UV or IR light radiation
- Candle flame effect
- E12 screw base
- 100 – 240 VAC power input
- Operation temperature: -20°C – +40°C
- Long lifetime: 40000 hours (L70)
- Optional Triac dimming function

Listing

U.L. Listed to U.S. and Canadian safety standards.

Product Dimensions

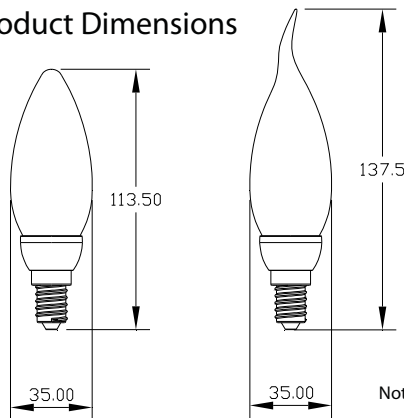

Notes: 1. Dimensions are in millimeters
 2. Tolerances unless otherwise mentioned
 ±5.0mm

Project	Date
Catalog Number	Type
Notes	



Contemporary



Candle Flame



Ordering Information:

RSL35B	3W	2700K	TD	OM	FL
Series	Output	Color	Dimming	Beam Spread	Shape
	3W Standard	2700K	ND Non Dimming	OM Omni Directional	CO Contemporary
			TD Triac Dimming		FL Candle Flame

Luminance and Technical Data

Luminous Flux measurement tolerance $\pm 10\%$

Light Color	Inc White / 2700K
Luminous Flux (Typ)	150 lm
Beam Angle	Omni Directional
CRI	> 80
Input Voltage/ Frequency	100-240VAC / 50 - 60Hz
Power Consumption	3W
Dimmability	ND, TD
Mechanical Dimensions	$\varnothing 35 \times 113.5\text{mm}$
Maximum Weight	35g
Storage Temperature	$-30^{\circ}\text{C} - +80^{\circ}\text{C}$

Supported Dimmer List

Manufacturer	Model	Volt / Freq (V/Hz)
Lutron	S-600	120/60
Lutron	DV-600P	120/60
Lutron	S-600PEH	120/60
Lutron	GL-600P	120/60

Zenaro Lighting Inc.
3610 Quantum Blvd.
Boynton Beach, FL 33426
Tel +561-424-2444
Fax +561-424-2440
www.zenarolighting.com

Disclaimer

1. Information on this data sheet is provided "AS-IS" without warranty of fitness for a particular purpose or noninfringement.
2. Zenaro reserves the right to change specification information without further notice to improve reliability, function or design.
3. When using this product, please observe operating environmental conditions noted. Zenaro assumes no responsibility for products damaged from abuse or use outside recommended or intended application.

